




P Type

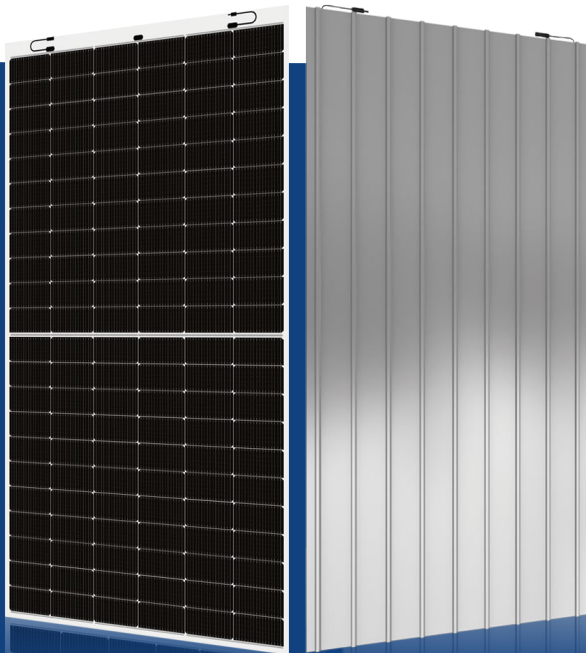

Lightweight Half-Cell Module ENE-LH132PA

455W~475W

475W
Maximum
Power Output

20.8%
Maximum
Module Efficiency

0~+5W
Power Output
Tolerance

Key Features



Lightweight

Optimized composite materials, 70% lighter at the same power



Low NMOT

As low as 43°C, improving the power generation efficiency



Customization

Customization for various scenarios, high additional value



Half Cell, SMBB Technology

Series-then-parallel cell connection design, more reliable soldering technology



Easy transportation and installation

Original design making it far less costly for transportation and installation



Superior Low Irradiance Performance

Excellent low irradiance performance, increase power generation in low-light conditions like mornings, evenings and cloudy days


Product and Quality Certifications

IEC 61215, IEC 61730

ISO 9001: Quality Management System

ISO 14001: Environment Management System

ISO 45001: Occupational Health and Safety Management System

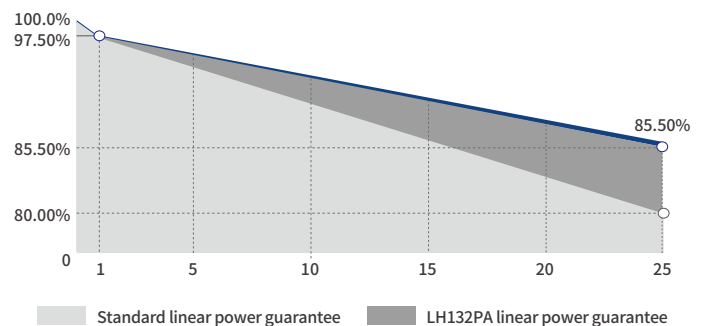

-2.50%

1st-year Degradation

-0.50%

Annual Degradation

12
Years


materials and
workmanship warranty

25
Years


linear
power warranty

Leading product and power warranty

Engineering Drawing (mm)

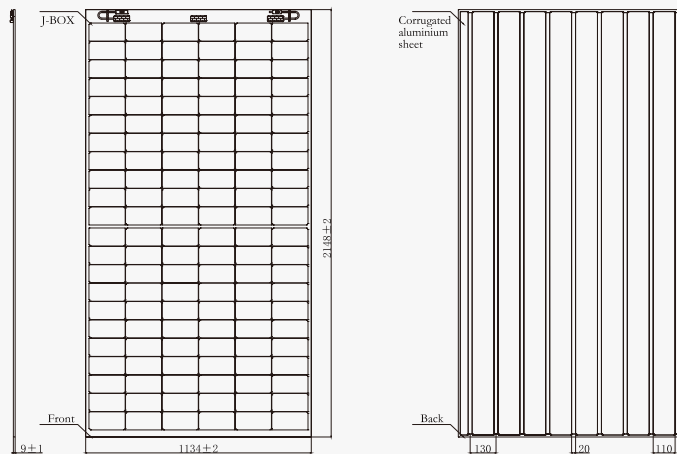

Characteristic Curves(470W)

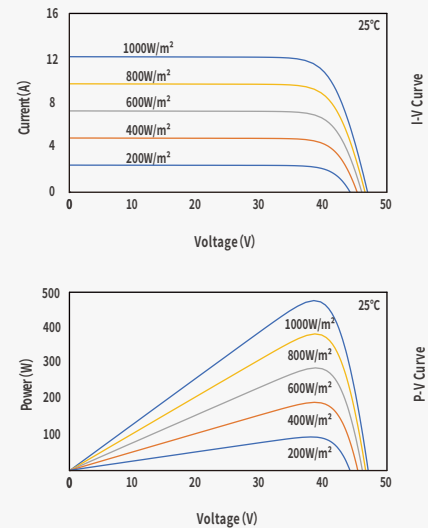

Electrical Parameters (STC *)

Nominal Max. Power(Pmax/W)	455	460	465	470	475
Open Circuit Voltage(Voc/V)	45.50	45.65	45.79	45.93	46.06
Short Circuit Current(Isc/A)	12.67	12.76	12.85	12.93	13.02
Operating Voltage(Vmp/V)	37.72	37.87	38.01	38.15	38.28
Operating Current(Imp/A)	12.06	12.15	12.24	12.32	12.41
Efficiency(%)	19.9	20.1	20.3	20.6	20.8

STC * : Irradiance = 1000 W/m², Cell Temperature = 25°C, AM = 1.5
Test condition is based on the front side

Mechanical Parameters

Cell Type	P Type
Module Size	2148 × 1134 × 9mm
Module Thickness	9mm
Module Weight	10.2Kg
Output Cable	4mm ² , cable length 250mm (can be customized)
Connector	MC4 Similar
Junction Box	IP68, 3 bypass diodes
Frame	No Frame

Electrical Parameters (NMOT *)

Nominal Max. Power(Pmax/W)	341.7	345.5	349.2	353.0	356.7
Open Circuit Voltage(Voc/V)	43.35	43.50	43.63	43.76	43.89
Short Circuit Current(Isc/A)	10.21	10.28	10.35	10.42	10.49
Operating Voltage(Vmp/V)	35.16	35.30	35.43	35.57	35.69
Operating Current(Imp/A)	9.72	9.79	9.86	9.93	9.99

NMOT *: Irradiance = 800 W/m², Ambient Temperature = 20°C, AM = 1.5,
Wind Speed = 1 m/s
Test condition is based on the front side

Operating Parameters

Max. System Voltage	DC1500V
Power Tolerance	0 ~ +5 W
Operating Temperature	-40°C ~ +85°C
Max. Fuse Rated Current	22A
Static Load	Front 5400Pa, Back 2400Pa

Temperature Coefficients

Short Circuit Current(Isc)	+0.038%/°C
Open Circuit Voltage(Voc)	-0.262%/°C
Nominal Max. Power(Pmax)	-0.341%/°C
NMOT	43 ±2°C

Packing Data

Packing Type	20'GP	40'HQ
Piece/Pallet	54	54
Pallet/Container	8	18
Piece/Container	432	972



Version number : ENE-MS-042-A01.V02
All data contained in this datasheet is subject to change without notice.
The right of final interpretation belongs to ENE Solar.

